



DRYING

HEAT PUMP DRYERS ADVANCE+ SR-11/16/23 TP2 PLUS HP



CHARACTERISTICS

TP2

- User friendly and totally programmable TP2 with 7" coloured touch screen.
- USB Connection. Online platform free of charge for programming, telemetry, data analysis, etc. thanks to the IoT.
- Videos on displays (ads, instructions, etc.).
- 37 languages.

OUTSTANDING FEATURES

- Reversing drum action as standard.
- Stainless steel drum as standard.
- Frequency inverter as standard.

EFFICIENCY

- Mixed axial-radial airflow.
- Big fluff filter.
- Double door glass.
- Low energy consumption.

VERSATILITY

- Make to order - customisation.
- Wet Cleaning.
- OPL > Multivending - Standard OPL model easily transformable to coin laundry uses.
- No need of exhaust to the exterior.

CONNECTIVITY

- IoT FagorKonnnect as standard.
- Management of laundries: OPL and COIN.
- Remote payment.

ERGONOMICS

- Drawer as fluff filter, made of stainless steel.
- Biggest door diameters.
- Opening sense of door adjustable on site.
- 180° opening hinges.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance.


OTROS

- Grey skinplate outer casing, stainless steel look.
- Drum with stamped holes.
- Anti-wrinkle at the end of the cycle.
- Filter drawer with wide surface.
- Water to refrigerate, which may be reused to wash.
- CE approved.

OPTIONS

- IoT - FagorKonnnect.
- Natural Gas heating.
- Opposite door opening.
- Tropicalized model.
- Stainless steel front and side panels.
- Front panel in stainless steel.
- Maritime wooden packing.
- Self-service payment systems.

	U.	SR-11 TP2 PLUS HP	SR-16 TP2 PLUS HP	SR-23 TP2 PLUS HP
CAPACITY				
Capacity 1/18	Kg	11,7	18,3	24,3
	Lb	25,7	40,4	53,6
Capacity 1/20	Kg	10,5	16,5	21,9
	Lb	23,1	36,3	48,3
DRUM				
Ø Drum	mm	750	750	835
	inch	29,53	29,53	32,87
Drum length	mm	475	746	800
	inch	18,70	29,37	31,5
Drum volume	l	210	330	440
	cu ft	7,41	11,64	15,54
Ø Door	mm	574	574	574
	inch	22,6	22,6	22,6
Floor to door center	mm	976	976	1.030
	inch	38,43	38,43	40,55
Floor to lower part of the door	mm	618	618	672
	inch	24,33	24,33	26,46
Drum motor power	kW	0,37	0,37	0,37
ELECTRIC POWER				
Installed heating power	kW	3,8 + 4 (7)	3,8 + 4 (7)	3,8 + 4 (7)
Installed electrical power	kW	8,77	8,77	8,77
Evaporation capacity	l/h	7,5	9,5	11,5
	USgallon/h	1,98	2,51	3,04
Hourly output	kg/h	15	18,9	22,9
	lb/h	33,1	41,7	50,5
VENTILATION				
Nominal air flow	m³/h	1.200	1.200	1.200
	cfm	706,29	706,29	706,29
Fan motor power	kW	0,55	0,55	0,55
HEAT DISSIPATION				
Total max heat dissipation	kW	0,67	1,01	1,34
	Btu/h	2294,3	3441,5	4588,6
Front pannel max heat dissipation	kW	0,42	0,63	0,84
	Btu/h	1433,9	2150,9	2867,9
CONNECTIONS				
Tension 400V - III + N + T	Nº x mm2 / A	5 x 4 / 20 A	5 x 4 / 20 A	5 x 4 / 20 A
Heat pump input (Cooling)	BSPP ISO 228-1	1/2 "	1/2 "	1/2 "
Heat pump output (Cooling)	BSPP ISO 228-1	1/2 "	1/2 "	1/2 "
Drainage for moisture extraction laundry	BSPP ISO 228-1 o Tubo Ø/Long	3/4"	3/4"	3/4"
DIMENSIONS / PACKING DIMENSIONS				
Net width / Gross width	mm	785 / 865	785 / 865	890 / 970
	inch	30,91 / 34,06	30,91 / 34,06	35,04 / 38,19
Net depth / Gross depth	mm	1.255 / 1.380	1.525 / 1.650	1.595 / 1.720
	inch	49,41 / 54,33	60,04 / 64,96	62,80 / 67,72
Net height / Gross height	mm	1.694 / 1.840	1694 / 1840	1.812 / 1.940
	inch	66,69 / 72,44	66,69 / 72,44	71,34 / 76,38
Net weight / Gross weight	Kg	342 / 356	357 / 372	380 / 395
	Lb	753,98 / 784,85	787,05 / 820,12	837,76 / 870,83
OTHERS				
Sound level	dB	64	64	64

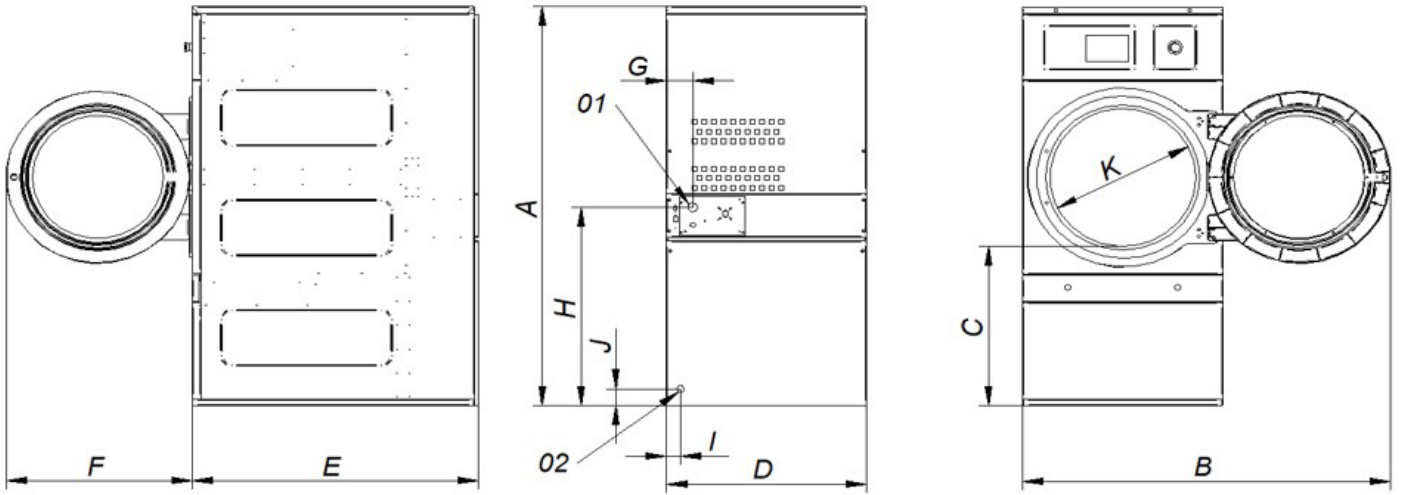

01. Electrical connection
 02. Condensed water evacuation
 650 mm hose (1) and 17 mm inner diameter
 (1) For greater distances, consult the installation manual.

	A	B	C	D	E	F	G	H	I	J	K
SR-11 TP2 PLUS HP	1694	1450	689	785	1040	730	103	850	55	90	574
SR-16 TP2 PLUS HP	1694	1450	689	785	1125	730	103	850	55	90	574
SR-23 TP2 PLUS HP	1812	1500	746	890	1255	730	108	828	55	90	574